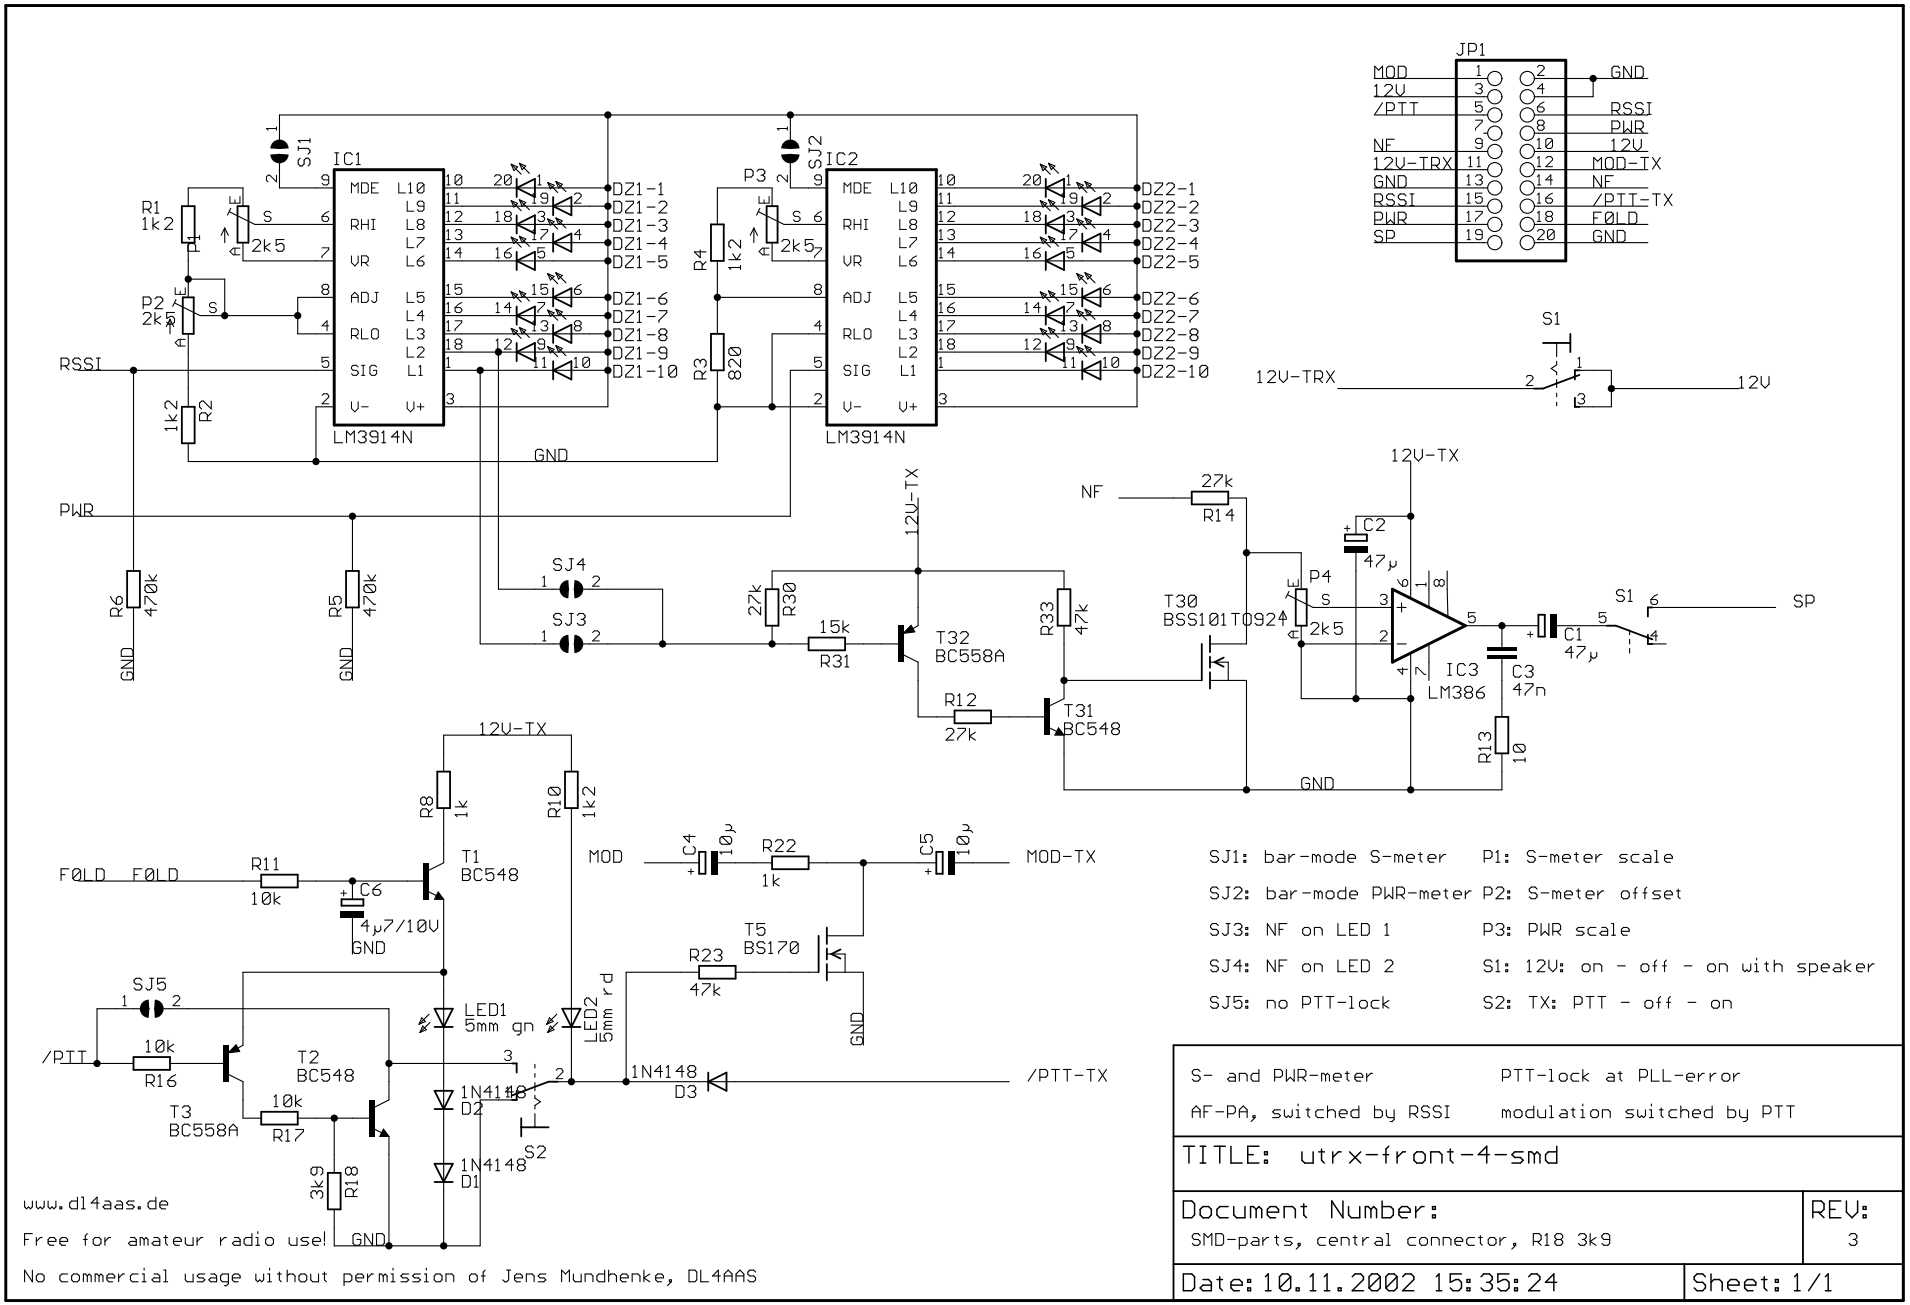

SJ1: bar-mode S-meter
SJ2: bar-mode PWR-meter
SJ3: NF on LED 1
SJ4: NF on LED 2
SJ5: no PTT-lock

P1: S-meter scale
P2: S-meter offset
P3: PWR scale
S1: 12V: on - off - on with speaker
S2: TX: PTT - off - on

S- and PWR-meter
AF-PA, switched by RSSI

PTT-lock at PLL-error
modulation switched by PTT

TITLE: utrx-front-4-smd

Document Number:
SMD-parts, central connector, R18 3k9

REV: 3

Date: 10.11.2002 15:35:24

Sheet: 1/1

www.dl4aas.de
Free for amateur radio use!
No commercial usage without permission of Jens Mundhenke, DL4AAS